



SPENZA CERAMICS PVT LTD
8A National Highway, Parsvanath Complex I
1st Floor, Shop No.C3, Opposite Kuber Cinema
Morbi – 363642 (Gujarat) INDIA

For Inquiry
0172 3500930
spenzaceramics@gmail.com

www.spenzaceramics.com




Trend Design +91 885 11111 519



रहें **SAPNO** से आगे...

600X1200MM
12mm-thickness

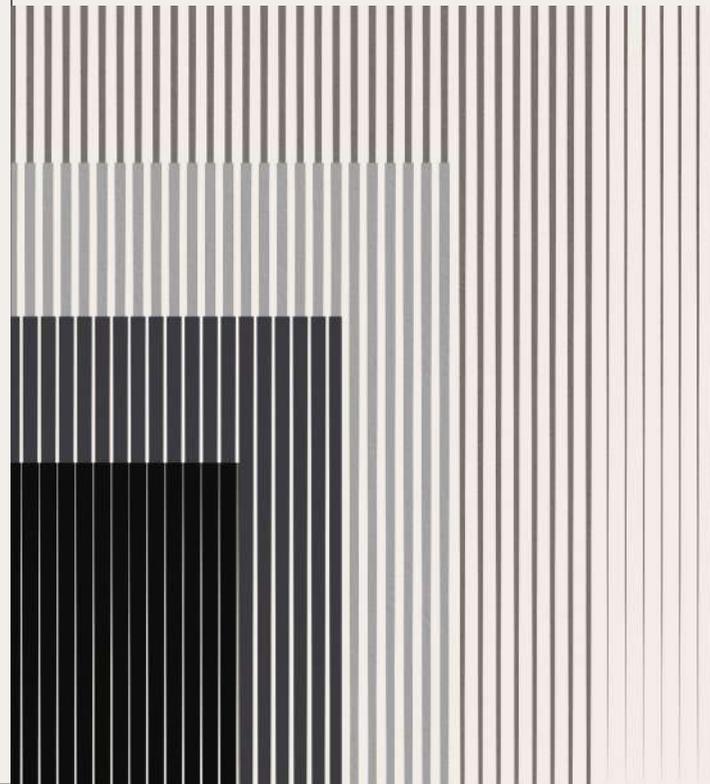

Full
BODY
VITRIFIED TILES

STORY OF THE SPENZA

At Spenza Ceramics, our journey started with a bold vision: to transform interior spaces into places of inspiration, not just practicality. Over the past decade, this vision has propelled us to the forefront of the ceramic industry, where our unwavering commitment to excellence sets us apart. Each tile we create is a testament to our dedication to quality craftsmanship and innovative design, leading trends rather than following them.

We invite you to continue this remarkable journey of innovation and creativity with us. Together, let's push the boundaries of ceramic design and elevate interior spaces to new levels. Join us as we shape the future, one tile at a time, creating spaces that inspire and endure.

16
Years of experience
in ceramic industry

150+
Builders and
Construction in India

22
Size in
Our House

18+
Spenza World Dealer
/ Exclusive Company
Showroom

280+
Dealers in
India

www.spenzaceramics.com



High Abrasion Resistance Property

Withstand wear, erosion, or damage caused by friction with surfaces that are made from qualitative sources of materials at areas with high foot traffic.



Chemical and stain Resistance


Prevent staining and discoloration with our chemical-resistant surfaces and enhance the durability of your space with the highly diverse applicable properties.




Impact Resistance

Have resistance against sudden blows without getting the surface cracked with our impact-resistant creations that integrity and longevity of your space.

**When you walk on
StoneKraft Anti-Slip surface**

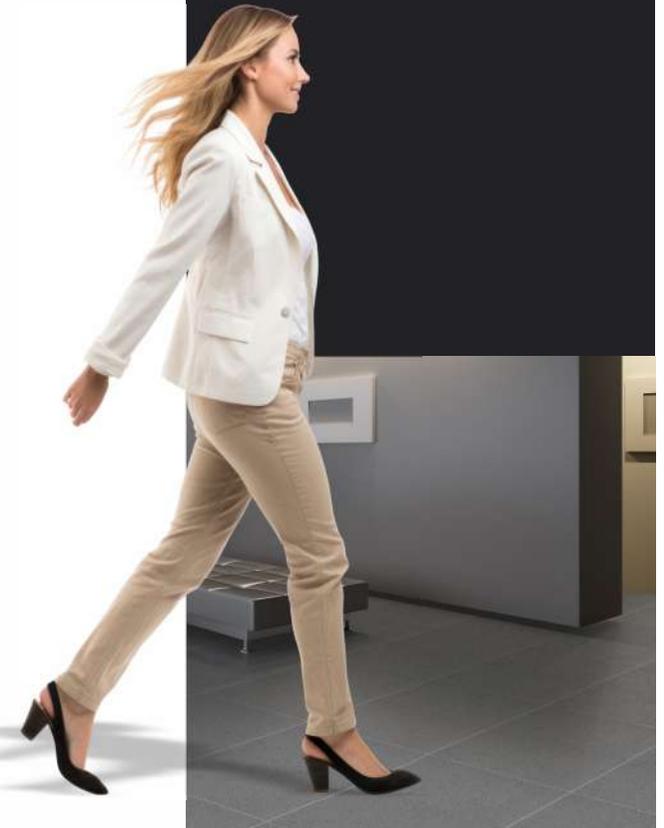

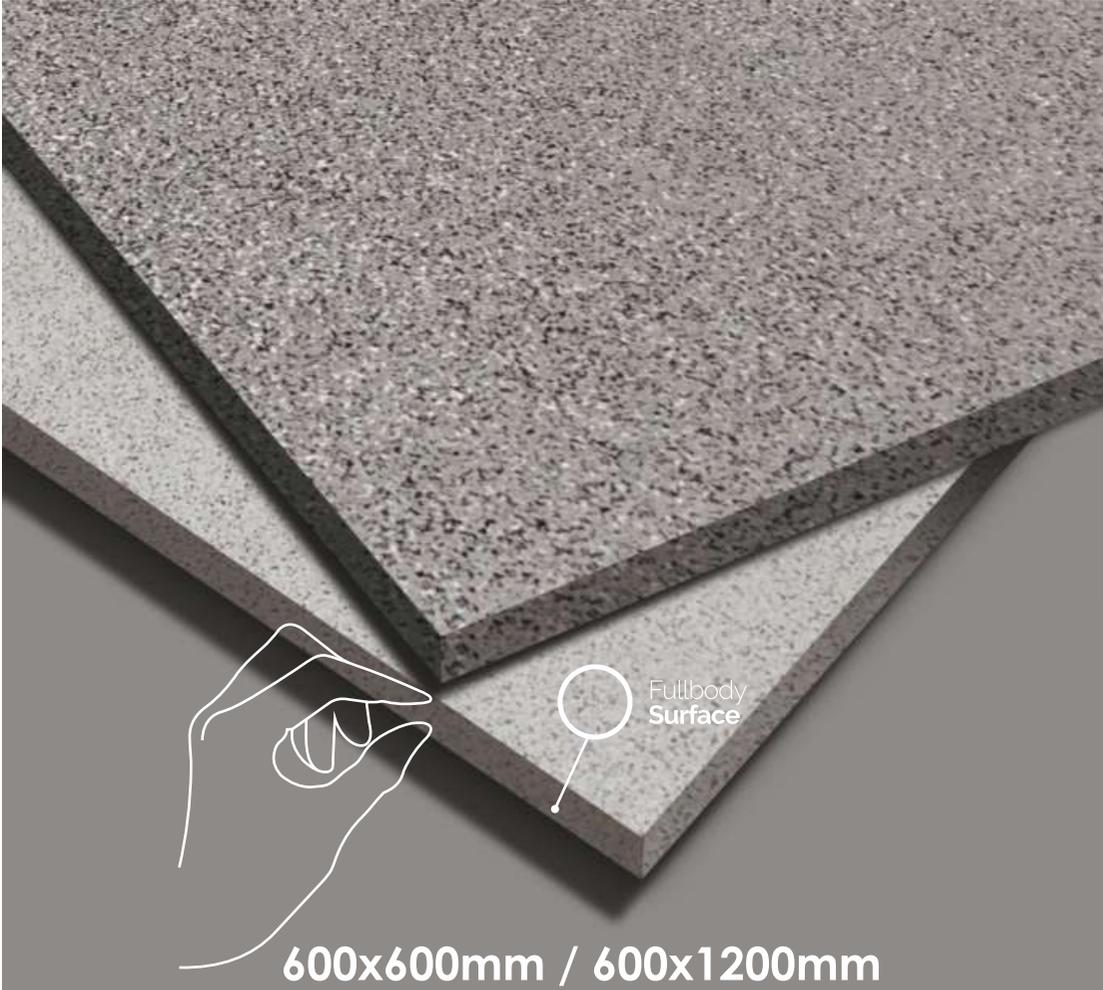

600x600mm / 600x1200mm

Full Body, Skid Resistant, Germ Free Vitrified Tile is an innovative product made from special ingredients with anti-microbial that inhibits growth of germs like bacteria and fungus. This full body product with skid resistant property can be safely used in hospitals, schools, residential areas, offices or any other commercial space, where longevity and hygiene is paramount.



Full Body

These tiles are ideal for zones with heavy footfall because even after extended use, their colour remains the same.



Skid Resistant

A versatile surface with skid resistant property these tiles perfect for zero slippage on slopes of up to 250



Germ-Free (99.99%)

A specially formulated anti-microbial glazed used during the manufacturing process enables these tiles to prevent habitation of germs like bacteria and fungus, making them an ideal choice for today's health-conscious consumers.

The full body Series is a work of diligence, providing homogeneous body tiles. The aesthetic appeal of the tile remains intact even after prolonged exposure to wear and tear, making it the most preferred durable tile. All the designs are made by mixing natural clay, feldspar, quartz and natural pigments. Our R & D experts use special pigment grains for even dispersion, ensuring minimal color variation across batches. All the touch points like silos, lifting machines, conveyor belts where the mixture passes through are treated with utmost care to nullify impurities as a precautionary measure, even the conveyor belt is covered to avoid dust.

Product Features:



HIGH STRENGTH



SCRATCH RESISTANT



ANTI-SKID



CHEMICAL RESISTANT



LOW MAINTENANCE




ECO FRIENDLY



Thickness
12mm (approx)

600x1200MM (24"x48")
Full BODY
VITRIFIED TILES

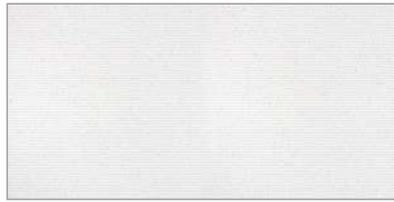

STONO SILVER (LINEAR)



STONO SILVER (POLISH)




STONO SILVER (RUSTIC)



STONO SILVER



STONO SILVER (STEP)



300x1200mm

600x1200mm



STONO ALMOND (LINEAR)




STONO ALMOND (RUSTIC)



STONO ALMOND (STEP)



STONO ALMOND




300x1200mm

600x1200mm



Thickness
12mm (approx)

600x1200MM (24"x48")
Full BODY
VITRIFIED TILES

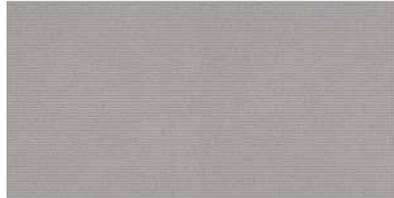

STONO CORN SILK (LINEAR)



STONO CORN SILK (MATT)





STONO CORN SILK (POLISH)




STONO CORN SILK (RUSTIC)



STONO CORN SILK (STEP)

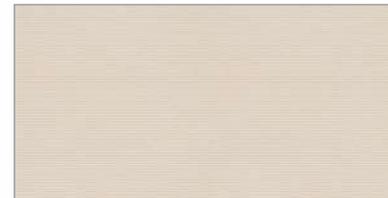

STONO GOLD (LINEAR)

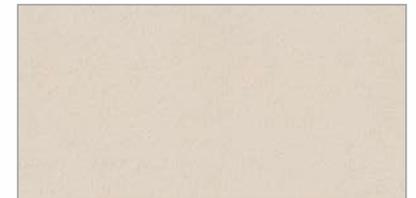

STONO GOLD (RUSTIC)




STONO GOLD



STONO GOLD (POLISH)



STONO GOLD (STEP)





Thickness
12mm (approx)


600x1200MM (24"x48")
Full BODY
VITRIFIED TILES



STONO GRAPHITE (LINEAR)



STONO GRAPHITE

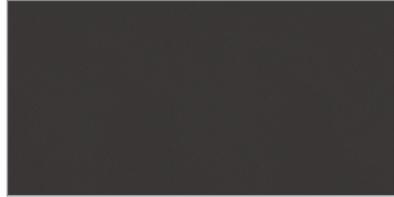

STONO GRAPHITE (RUSTIC)




STONO GRAPHITE (STEP)




300x1200mm



600x1200mm

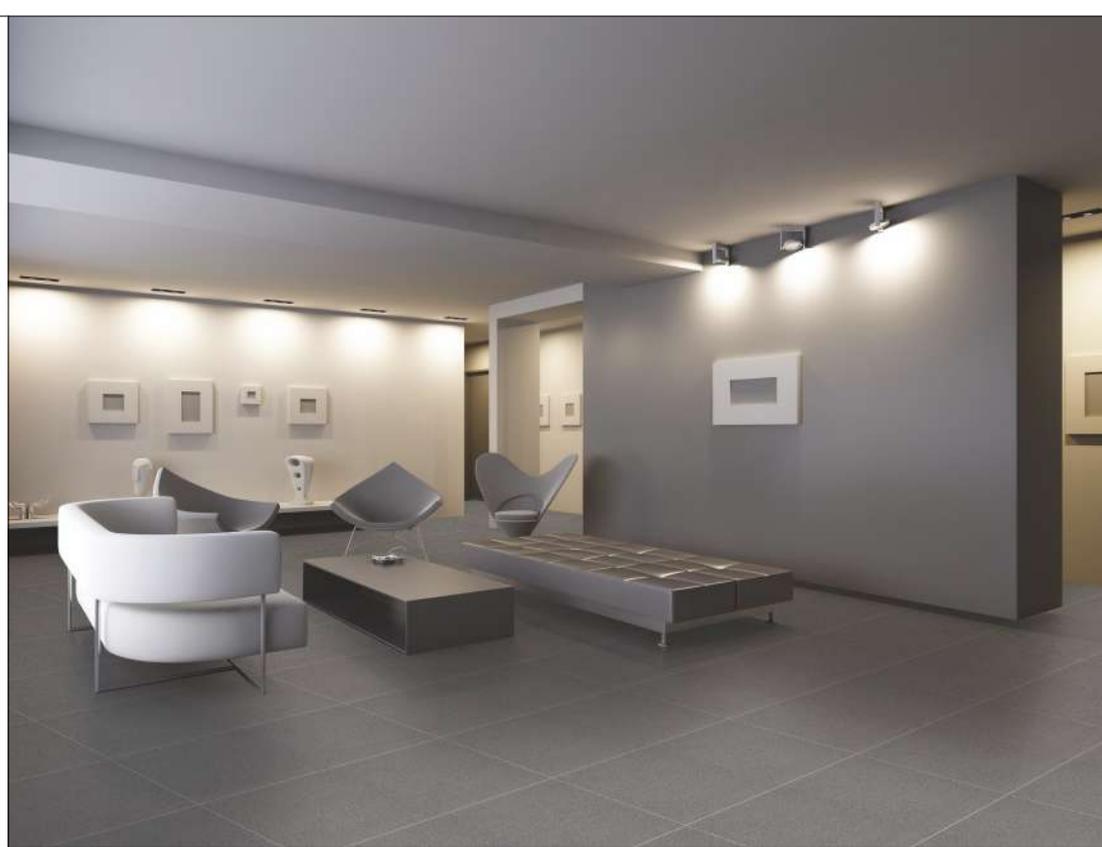

STONO GRIS (LINEAR)

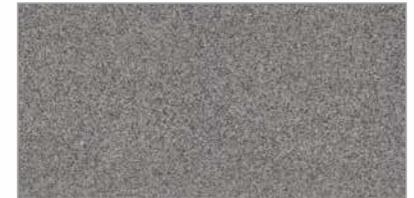

STONO GRIS (POLISH)



STONO GRIS (RUSTIC)



STONO GRIS



STONO GRIS (STEP)



300x1200mm



600x1200mm



Thickness
12mm (approx)

600x1200MM (24"x48")
Full BODY
VITRIFIED TILES



STONO NERO (LINEAR)



STONO NERO (RUSTIC)




STONO NERO



STONO NERO (POLISH)



STONO NERO (STEP)



STONO PEACH (LINEAR)



STONO PEACH (POLISH)




STONO PEACH (RUSTIC)



STONO PEACH



STONO PEACH (STEP)





Thickness
12mm (approx)

600x1200MM (24"x48")
Full BODY
VITRIFIED TILES



STONO TERRA (LINEAR)





STONO TERRA (RUSTIC)



STONO TERRA (STEP)



STONO TERRA

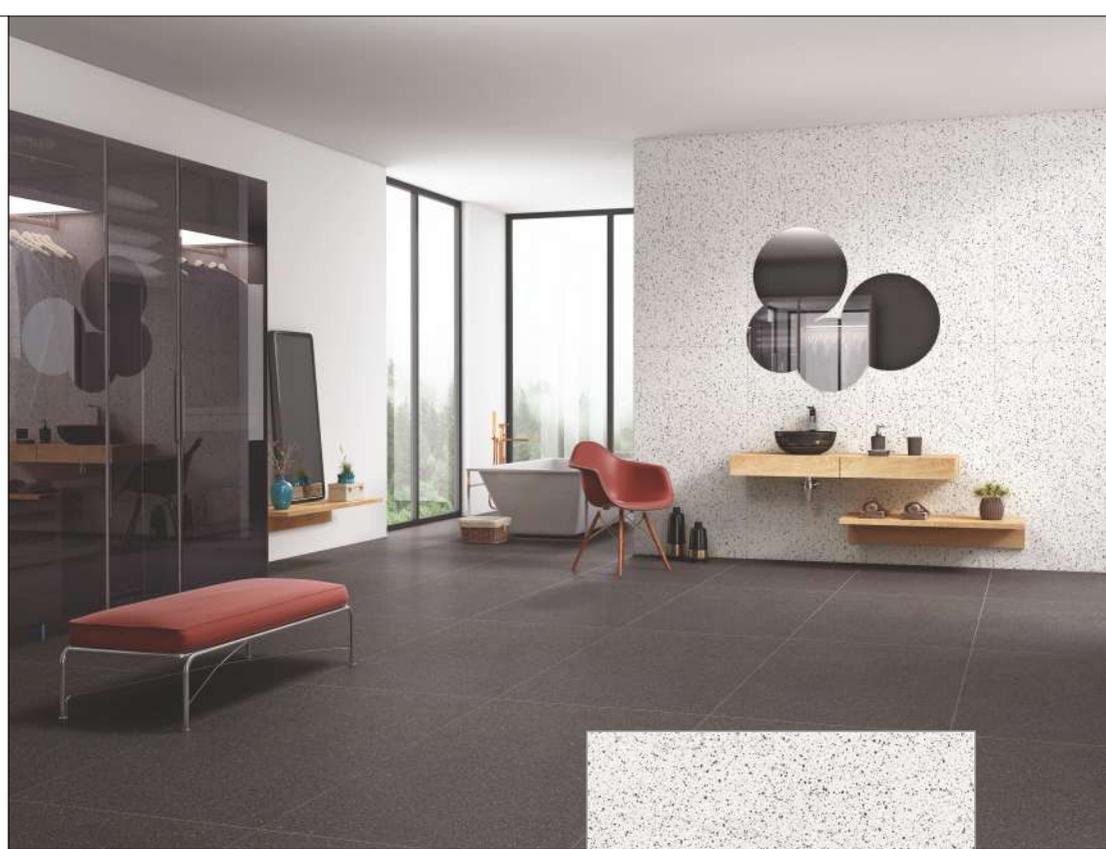

TERRAZO SLIVER



TERRAZO AVARIO



TERRAZO COTTA



TERRAZO NERO



TERRAZO PEACH



TECHNICAL SPECIFICATION

Sr. No.	CHARACTERISTICS	STANDARD AS PER IS 15622:2006 GROUP BIA	MAIN VALUE OF SPENZA CERAMICS FULL BODY VITRIFIED TILES
Regulatory Properties			
1	Deviation in length & width	±0.5 %	±0.1 %
2	Deviation in thickness	±5.0 %	±3.0 %
3	Straightness of sides	±0.5 %	±0.1 %
4	Rectrangularity	±0.5 %	±0.1 %
5	Surface Flatness	±0.5 %	±0.2 %
6	Glossiness	As per mfg.	Matt surface
Structural Properties			
7	Water absorption	<0.50 %	≤ 0.10 %
8	Apparent density	>2.0 g/cc	>2.10 g/cc
Massive Mechanical Properties			
9	Modulus Rupture	MIN 35 N/mm ²	MIN 40 N/mm ²
10	Impact resistance	As per mfg.	Min. 0.55
Surface Mechanical Properties			
11	Surface abrasion resistance	As per mfg.	Min Class 5
12	MOH's hardness	As per mfg.	Min 5
Thermo Hydrometric Properties			
13	Frost resistance	No Damage	No Damage
14	Thermal shock resistance	No Damage	No Damage
15	Moisture expansion	Nil	Nil
16	Crazing resistance	As per mfg.	Min. 10 Cycle
Chemical Properties			
17	Chemical resistance	No Damage	No Damage
18	Stain resistance	Resistance	Resistance
Safety Properties			
19	Anti Skid (COF)	As per mfg.	Matt <0.75
20	Fire resistance	As per mfg.	Fire proof

PACKING DETAILS

SR NO	SIZE	THICKNESS (APPROX.)	NO OF TILES (PER BOX)	AREA (APPROX.)
1	600 X 1200 MM	12 MM	2	15.5 SQ. FT.
2	300 X 1200 MM	12 MM	4	15.5 SQ. FT.

Our Brands



ADHESIVE • EPOXY • CLEANERS

THE BUILDER'S CHOICE **SPENZA** BOND BEYOND BEST



Antibacterial effectiveness



Anti-pollution effectiveness



Self-cleaning effectiveness



Anti-odour effectiveness